

ALLIED PROTECTIVE GLAZING LLC


A Member of the LTI Group

www.APGlazing.com

PRODUCT IDENTIFICATION:

LTI-GCP1316

Product Configuration

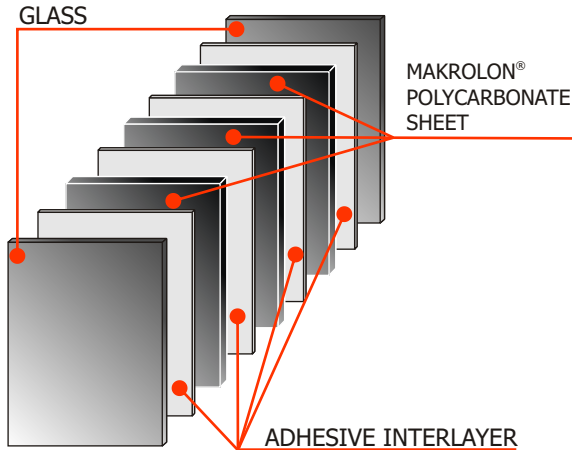

Product Specification

The LTI-GCP1316 containment laminate is made up of the following construction:

- 1/8" Glass
- Adhesive interlayer
- 1/8" Makrolon® Polycarbonate Sheet
- Adhesive interlayer
- 1/8" Makrolon® Polycarbonate Sheet
- Adhesive interlayer
- 1/8" Makrolon® Polycarbonate Sheet
- Adhesive interlayer
- 1/8" Glass

The LTI-GCP1316 containment security glazing is a symmetrical composite of heat strengthened, tempered or annealed glass clear adhesive interlayers, and a polycarbonate core.

The demands for security glass is increasing. The LTI Containment Grade products are custom manufactured to be utilized in secure environment applications where consistent quality and optimum optical clarity are priorities.

Testing & Ratings

HPW -T.P 0500.03

FORCED ENTRY: **PASSED** - FORCED ENTRY LEVEL II

BALLISTICS: **PASSED** - NO PENETRATION - LOW SPALL (.38 Special 3 Shots) & (9mm 3 Shots)

WMFL Level III - **PASSED** - 30 Minute Physical Attack

STANDARDS

ASTM C1048 - Standard Specification for Heat-Treated Flat Glass Kind HS, Kind FT Coated and Uncoated Glass.
ANSI Z97.1, CPSC 16 CFR 1201 Cat I & 2 for Impact

Physical Properties, Typical

Spall Type	Low-spall
Weight	6.160 lb/sqft
Thickness	0.7750 In
Max Size	60 X 96 In
Smartglass Option Avail	Yes

*Represents typical properties, not intended for specification

Glazing Instructions

Allied Protective Glazing, Inc. strongly suggests the use of a suitable structural security framing with an appropriate protection rating.

A minimum framing engagement of one (1) inch is recommended, (Larger lites may require deeper engagements.)

It is imperative to the life and durability of certain composite types that compatible sealant or gasket material is used on both sides of the laminate. An appropriate sealant solution can be specified by Allied if required.

Allied Protective Glazing produces the finest glass and composite laminates in the world, proper care during installation will ensure years of superior performance.



www.APGlazing.com

Allied Protective Glazing LLC and/or Sheffield Plastics will not be responsible for the use of this information relative to actual application. Users must make their own determination of its suitability for their specific application. No warranty is made for the fitness of any product, and nothing herein waives any of the seller's conditions of sale.

14 Federico Drive Pittsfield, MA 01201

+1 413.637.5001 FX: +1 413.637.5004